



## CONSTRUCTION/CLASSIFICATION

Year of construction	2002
Classification	✕ HULL ✕ MACH Offshore support vessel (Fire-fighting 1, Supply) Tug Unrestricted navigation ✕ AUT- UMS, MONSHAFT, INWATERSURVEY
IMO no.	9242766
Call sign	ORQU
Flag	Belgian
Port of registry	Antwerp
Trading area	Worldwide/Unrestricted

## PROPULSION AND MAIN SYSTEMS

Main engines	2 x WARTSILLA 16V 32 LND 8166 bhp/ 6000 kW driving two controllable pitch propellers in fixed nozzles
Propulsion	2 x 6000 kW @ 750 rpm
Steering gear	450 AGC-KR-600 Rolls-Royce Marine controlled twin high lift rudders
Bow thruster	2 x electrically driven 588 kW each
Stern thruster	1 x electrically driven 660 kW
Fire fighting	FiFi 1-2 x Skum SFP 250 x 350 pumps each delivering 1,200 cbm/h through combined water/foam monitors, situated port and starboard with remote control

## MAIN DATA

Length overall	67.40 m
Breadth moulded	15.50 m
Depth moulded	7.50 m
Max draught	7.44 m
Design draught	6.20 m
Gross tonnage	2,258 GT
Bollard pull ahead	207.2 t
Speed max	17 kn
Speed economic	12 kn
Deck area	344 m <sup>2</sup>
Max deck cargo	700 t

## FEATURES


Accommodation	20 berths, 15 single & 6 double cabins with all private facilities
Bunker capacity:	Fuel m <sup>3</sup> : 1,481 cbm MGO Fresh water m <sup>3</sup> : 420 cbm FW
Chain lockers	(2#) of 112 m each

**DECK EQUIPMENT**

Towing and anchor handling winches	BRATTVAAG triple drum Brattvaag: power 300 t (1 <sup>st</sup> layer), brake holding load 450 t (1 <sup>st</sup> layer) (2#) AH drum wire capacity 1,200 m dia. 76 mm (1#) towing drum wire capacity 1,500 m dia. 76 mm
Rope reels	2 x powered rope reels
Forward winch	Hydraulic anchoring windlass with 2 cable lifters of 38 mm chains, 2 mooring drums and 2 warping ends, 2 x spek anchors
Capstan winches	2 x 10 t hydraulic capstans aft

**DECK EQUIPMENT**

Tugger winches	2 x 10 t hydraulic tugger winches
Stern roller	(1#) SWL 500 t, l 4.5m x b 2.5 m
Crane	PALFINGER MARINE 1 x deck crane SWL 3 t @ 15 m 1 x crane for rescue boat, 1 t
Towing pins	1 set of KARM towing pins, 240 t
Stopper pins	2 KARM forks SWL 500 t
Gypsy wheels	(2#) non-declutchable cable lifters for 3.25 inch chain

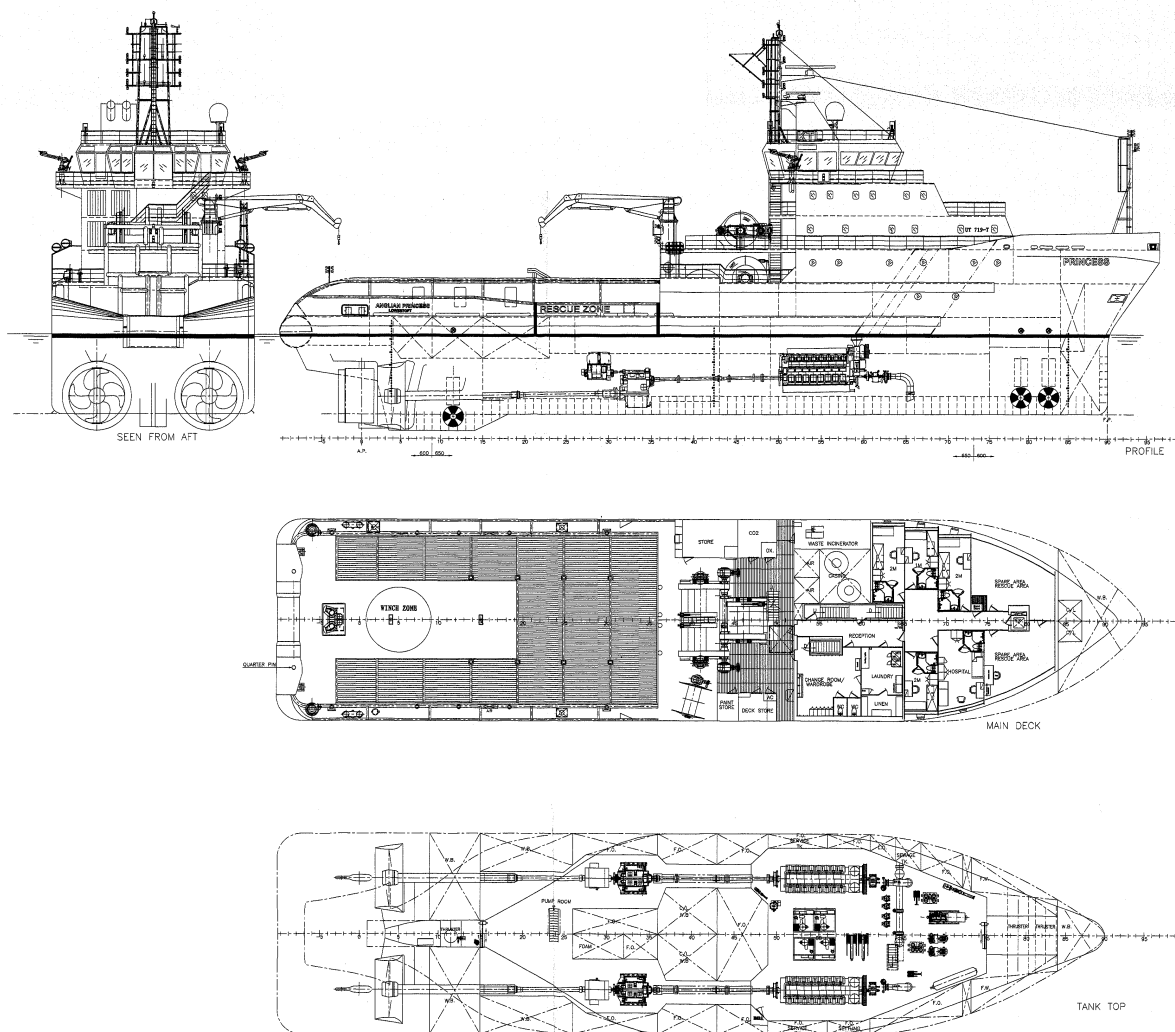

**GENERAL ARRANGEMENT PLAN**

**Boskalis**  
PO Box 43  
3350 AA Papendrecht  
The Netherlands  
T +31 78 69 69 000  
offshore.energy@boskalis.com  
www.boskalis.com/offshore